

# Videojet® 2120

Large Character Ink Jet Printer

## Ink Jet.

Laser.

Thermal Transfer.

Labelers.

Track & Trace.

Supplies.

Parts & Service.



The Videojet 2120 is an easy-to-use printer for applying single or twin line alphanumeric codes to a variety of products or packages. A choice of printheads and inks enable it to print on a wide range of porous and nonporous materials.

## Multiple printhead and ink options provide application flexibility

- The 2120 can control two printheads for opposite side case coding, and also offers multiple printer control from one screen for more complex, multi-line coding
- The 700 series printhead is ideal for printing on porous surfaces such as corrugated cardboard cartons and trays, paper bags and sacks, timber, gypsum board, paper reels and similar materials
- The 800 series printhead is ideal for printing on nonporous surfaces such as plastic bags and sacks, plastic containers and shrink-wrap, coated corrugated cardboard, foils, metals, piping and other similar materials

## Easy to operate helps reduce coding errors

- Pre-programmed jobs are ready for use or can be customized with minimal effort
- Message Management templates limit operator's choices to predefined values, greatly reducing the chance of printing the wrong code
- Jobs can be transferred to additional printers using common USB storage devices

## Guided installation reduces setup/startup time

- An automated setup wizard makes printer installation a breeze
- Printer setup can be "cloned" and transferred to another printer using a USB storage device

## Advanced Message Management features

- Messages can be created remotely on a PC using the optional CLARISOFT® software
- Remote Database Mode enables an operator to download messages from a centralized database or ERP system

**VIDEOJET®**  
Uptime Peace of Mind®



**System Includes**

- User interface and controller
- External power supply and bracket
- Printhead(s)
- Printhead cable(s)
- Ink system plus level detect, 1 Liter
- Level detect harness
- Bracket kit
- Product sensor

**Built-in Software Functions**

- Time of day, internal or remote
- Real Time Clock (RTC)
- Counters: increment and decrement numbers or characters
- Remote download through RS232 or TCP/IP communication
- Print delay
- Print orientation: inverted, reversed or both

**Print Formats**

- Upper and lower case character
- Multi-stroke characters
- Bold characters
- Escapement
- Long and short characters
- Print orientation: inverted, reversed or both

**Print Height and Print Speeds**

Note: Minimum speed is 26 fpm (8 m/min.) for both 700 and 800 series printheads  
Note: Dot size setting can have an effect on the maximum line speed

**700 Series printheads (for porous substrates)**

Printhead	# of dots	Print Height	Max Line Speed
707	7	0.5" 13 mm	236 fpm 72 m/min.
707	7	0.8" 20 mm	371 fpm 113 m/min.
716	16	1.2" 30 mm	236 fpm 72 m/min.
716	16	2.0" 50 mm	371 fpm 113 m/min.

**800 Series printheads (for nonporous substrates)**

Printhead	# of dots	Print Height		Max Line Speed	
		55°	80°	55°	80°
807	7	1.5" 37 mm	0.4" 11 mm	413 fpm 126 m/min.	285 fpm 87 m/min.
816*	16	3.6" 92 mm	1.1" 28 mm	413 fpm 126 m/min.	285 fpm 87 m/min.

\*For 5x5 font matrix, max speed at stated print height is 220 fpm (67 m/min.)

**Inks and Delivery Systems**

- Colors: black, red, blue
- Capacity: Standard 1 liter; 5 gallon with optional ADS Plus
- Characters/liter
  - 707 Printhead (7 Dot Font) - 300,000 characters/liter
  - 716 Printhead (16 Dot Font) - 56,000 characters/liter
  - 807 Printhead (7 Dot Font) - 400,000 characters/liter
  - 816 Printhead (16 Dot Font) - 60,000 characters/liter
- Surfaces: porous and nonporous
- Delivery: optional Automated Delivery System (ADS Plus)

**Electrical Specifications**

- Mains Voltage: 100 to 240 VAC
- Frequency: 47 to 63 Hz
- Input Current: 1.07 A Max
- Safety Protection: Class I

**Environmental Specifications**


- Operating temperature: 5°C to 40°C (41°F to 104°F)
- Rate of change of ambient temperature: 10°C (50°F) per hour maximum
- Relative humidity: 10 to 90% non-condensing

**Weight**


- CLARiTY® Controller 2.54 lbs (1.15 Kg)
- 700 Series printhead (7 valve) 1.10 lbs (0.5 Kg)
- 700 Series printhead (16 valve) 1.99 lbs (0.9 Kg)
- 800 Series printhead (7 valve) 0.88 lbs (0.4 Kg)
- 800 Series printhead (16 valve) 1.87 lbs (0.85 Kg)




**Controller Dimensions**

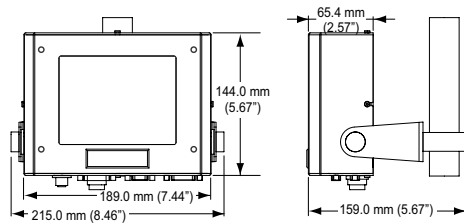

**800 Series Printhead Dimensions**

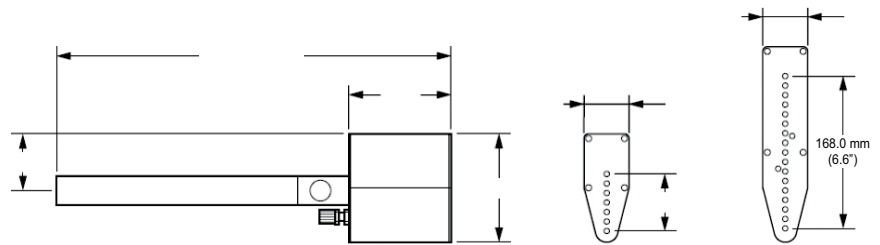

**700 Series Printhead Dimensions**

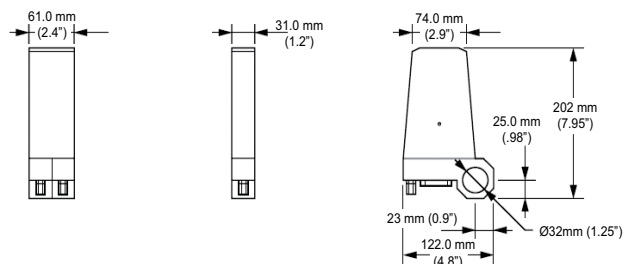

**Distr**

- |  |   |   |
|--|---|---|
| <b>Signode AB</b><br>T +46 8 6309960<br>F +46 8 7561930<br>E info@signode.se<br>www.signode.se | <b>Norsk Signode AS</b><br>T +47 32 231880<br>F +47 32 231881<br>E firmapost@signode.no<br>www.signode.no | <b>Signode Danmark</b><br>T +45 43 622133<br>F +45 43 622240<br>E info@signode.se<br>www.signode.dk |
|--|---|---|

